


M623 Signal Straight Male Socket (Crimp, Mount hole 19.8x19.8)

尺寸图

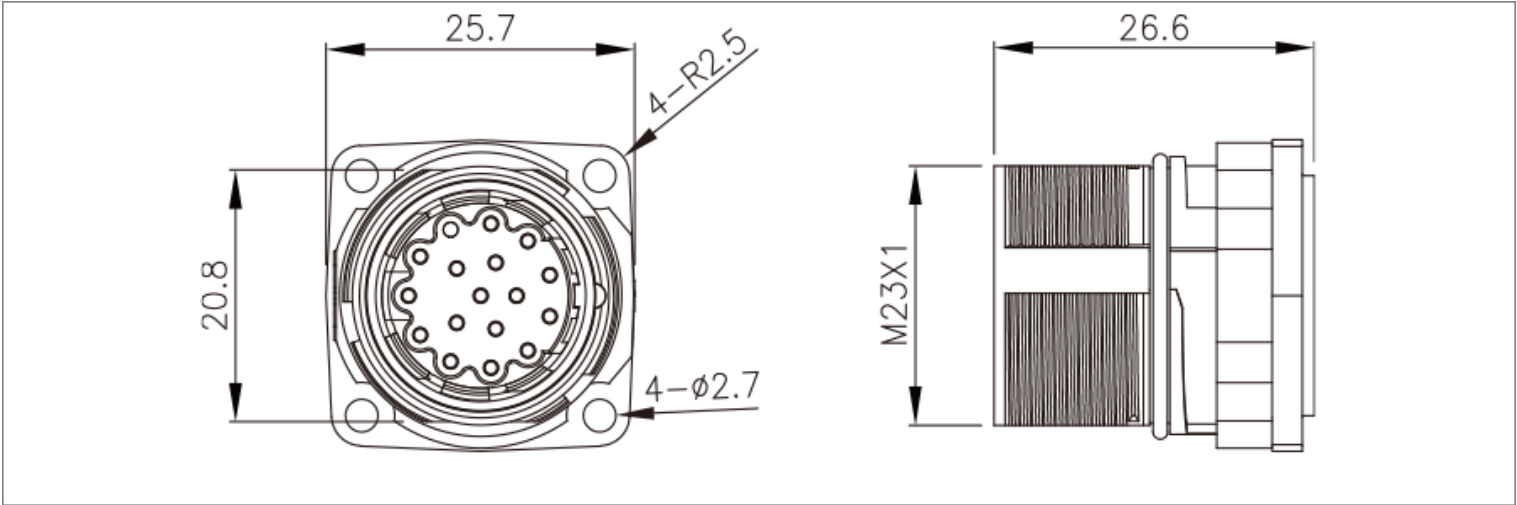

接线定义

芯位	线芯颜色		导体规格
	6芯		
1	BK U		1.5mm ²
2	BN V		1.5mm ²
3	GN YE		1.5mm ²
4	BK		1.5mm ²
5	WH		1.5mm ²
6	BN K		1.5mm ²

芯位	线芯颜色		导体规格
	8芯		
1	BK 1		1.5mm ²
PE	GN YE		1.5mm ²
3	BK 2		1.5mm ²
4	BK 3		1.5mm ²
A	BK 5		0.75mm ²
B	BK 6		0.75mm ²
C	BK 7		0.75mm ²
D	BK 8		0.75mm ²

芯位	线芯颜色		导体规格
	12芯		
1	PK		0.25mm ²
2	RD		0.25mm ²
3	BK		0.25mm ²
4	BU		0.25mm ²
5	BN		0.25mm ²
6	GN		0.25mm ²
7	VT		0.25mm ²
8	GY		0.25mm ²
9	外部护套		
10	WH		0.5mm ²
11	NC		
12	BN		0.5mm ²

芯位	线芯颜色		导体规格
	17芯		
1	YE		0.14mm ²
2	GN		0.14mm ²
3	RD		0.14mm ²
4	NC		
5	BU		0.14mm ²
6	NC		
7	BNBU		0.5mm ²
8	GNBK		0.22mm ²
9	GNRD		0.22mm ²
10	BNRD		0.5mm ²
11	BK		0.14mm ²
12	BN		0.14mm ²
13	OG		0.14mm ²
14	WHBK		0.14mm ²
15	BNGY		0.22mm ²
16	BNYE		0.22mm ²
17	内部护套		

*接线定义按常规标准，如按协议或者其他请联系我司业务。

电气参数

M623 Signal Straight Male Socket (Crimp, Mount hole 19.8x19.8)

芯数	P型	额定电流	额定电压		导体规格		E型
			A/C	D/C	AWG	mm ²	
6		20A	300V	300V	14	2.5	
7		20A	300V	300V	14	2.5	
9		8A	150V	150V	16	1.5	
9P(8+1)		8A/20A	300V	150V	16/14	1.5/2.5	
12		8A	150V	150V	18	1	
17		8A	150V	150V	18	1	