


Angled M623 Signal Male Square Assembled Socket (Crimp Mount hole 19.8x19.8)

尺寸图

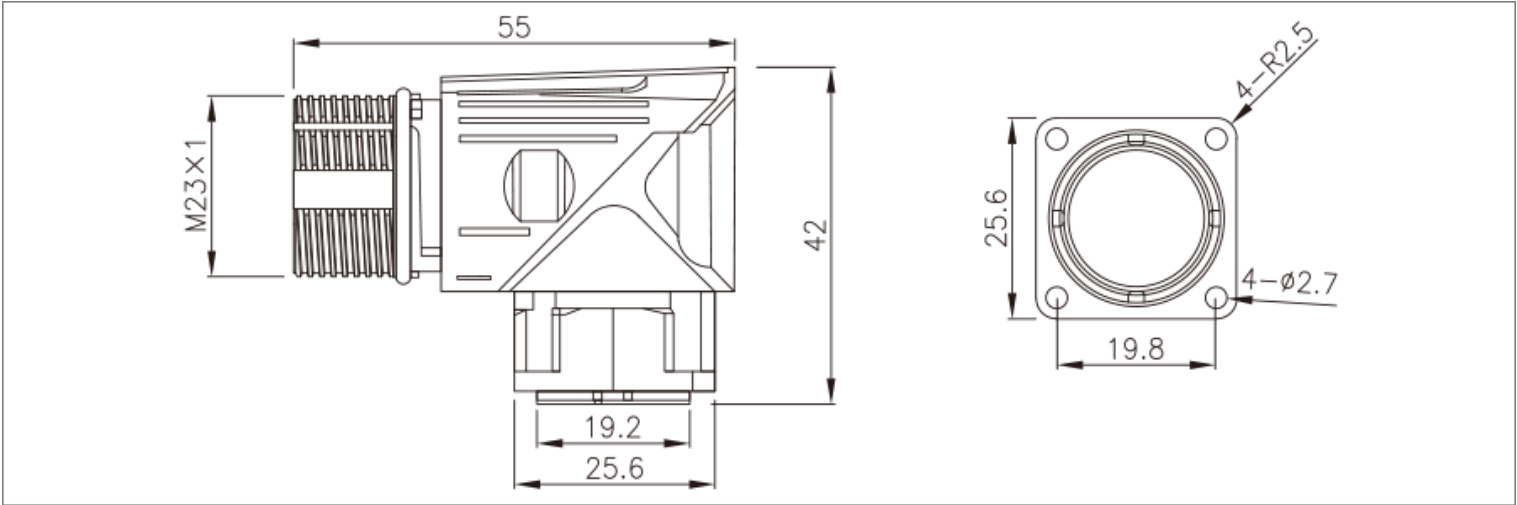

接线定义

| 芯位 | 线芯颜色 | 导体规格               |
|----|------|--------------------|
| 6芯 |      |                    |
| 1  | BK U | 1.5mm <sup>2</sup> |
| 2  | BN V | 1.5mm <sup>2</sup> |
| 3  | GNYE | 1.5mm <sup>2</sup> |
| 4  | BK   | 1.5mm <sup>2</sup> |
| 5  | WH   | 1.5mm <sup>2</sup> |
| 6  | BN K | 1.5mm <sup>2</sup> |

| 芯位 | 线芯颜色 | 导体规格                |
|----|------|---------------------|
| 8芯 |      |                     |
| 1  | BK 1 | 1.5mm <sup>2</sup>  |
| PE | GNYE | 1.5mm <sup>2</sup>  |
| 3  | BK 2 | 1.5mm <sup>2</sup>  |
| 4  | BK 3 | 1.5mm <sup>2</sup>  |
| A  | BK 5 | 0.75mm <sup>2</sup> |
| B  | BK 6 | 0.75mm <sup>2</sup> |
| C  | BK 7 | 0.75mm <sup>2</sup> |
| D  | BK 8 | 0.75mm <sup>2</sup> |

| 芯位  | 线芯颜色 | 导体规格                |
|-----|------|---------------------|
| 12芯 |      |                     |
| 1   | PK   | 0.25mm <sup>2</sup> |
| 2   | RD   | 0.25mm <sup>2</sup> |
| 3   | BK   | 0.25mm <sup>2</sup> |
| 4   | BU   | 0.25mm <sup>2</sup> |
| 5   | BN   | 0.25mm <sup>2</sup> |
| 6   | GN   | 0.25mm <sup>2</sup> |
| 7   | VT   | 0.25mm <sup>2</sup> |
| 8   | GY   | 0.25mm <sup>2</sup> |
| 9   | 外部护套 |                     |
| 10  | WH   | 0.5mm <sup>2</sup>  |
| 11  | NC   |                     |
| 12  | BN   | 0.5mm <sup>2</sup>  |

| 芯位  | 线芯颜色 | 导体规格                |
|-----|------|---------------------|
| 17芯 |      |                     |
| 1   | YE   | 0.14mm <sup>2</sup> |
| 2   | GN   | 0.14mm <sup>2</sup> |
| 3   | RD   | 0.14mm <sup>2</sup> |
| 4   | NC   |                     |
| 5   | BU   | 0.14mm <sup>2</sup> |
| 6   | NC   |                     |
| 7   | BNBU | 0.5mm <sup>2</sup>  |
| 8   | GNBK | 0.22mm <sup>2</sup> |
| 9   | GNRD | 0.22mm <sup>2</sup> |
| 10  | BNRD | 0.5mm <sup>2</sup>  |
| 11  | BK   | 0.14mm <sup>2</sup> |
| 12  | BN   | 0.14mm <sup>2</sup> |
| 13  | OG   | 0.14mm <sup>2</sup> |
| 14  | WHBK | 0.14mm <sup>2</sup> |
| 15  | BNGY | 0.22mm <sup>2</sup> |
| 16  | BNYE | 0.22mm <sup>2</sup> |
| 17  | 内部护套 |                     |

\*接线定义按常规标准，如按协议或者其他请联系我司业务。

电气参数

Angled M623 Signal Male Square Assembled Socket (Crimp,  
Mount hole 19.8x19.8)

| 芯数      | P型                                                                                  | 额定电流   | 额定电压 |      | 导体规格  |                 | E型                                                                                    |
|---------|-------------------------------------------------------------------------------------|--------|------|------|-------|-----------------|---------------------------------------------------------------------------------------|
|         |                                                                                     |        | A/C  | D/C  | AWG   | mm <sup>2</sup> |                                                                                       |
| 6       |    | 20A    | 300V | 300V | 14    | 2.5             |    |
| 7       |    | 20A    | 300V | 300V | 14    | 2.5             |    |
| 9       |    | 8A     | 150V | 150V | 16    | 1.5             |    |
| 9P(8+1) |    | 8A/20A | 300V | 150V | 16/14 | 1.5/2.5         |    |
| 12      |    | 8A     | 150V | 150V | 18    | 1               |    |
| 17      |  | 8A     | 150V | 150V | 18    | 1               |  |