


Angled M623 Signal Male Square Assembled Socket (Crimp Mount hole 19.8x19.8)

尺寸图

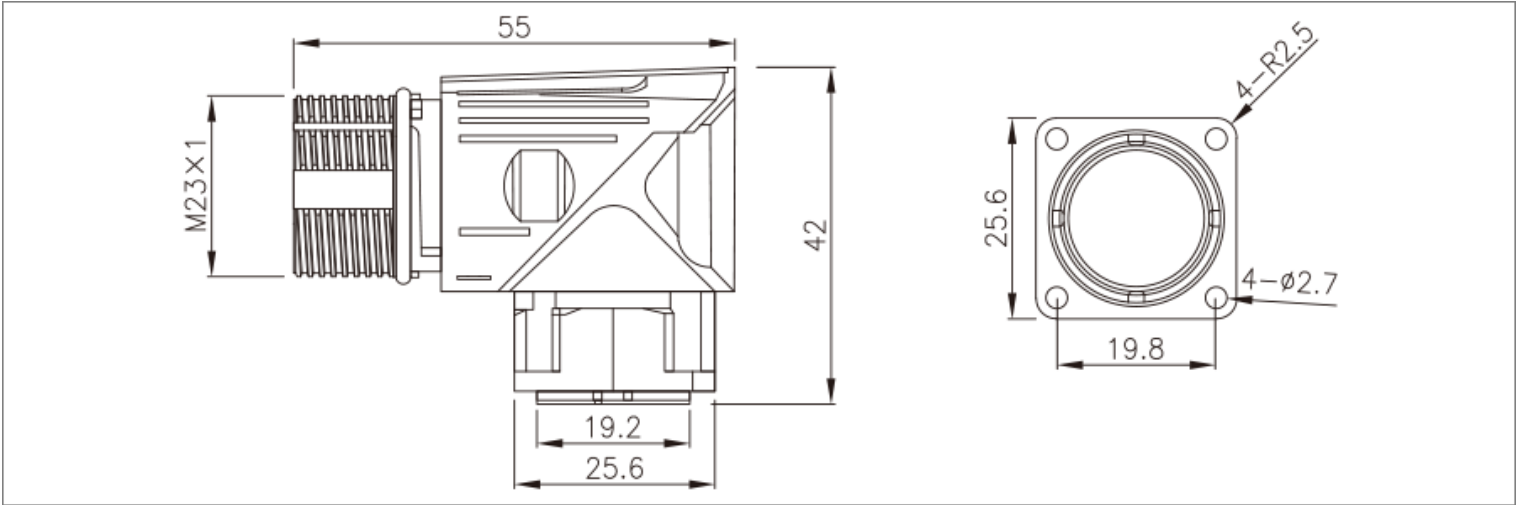

接线定义

芯位	线芯颜色	导体规格
6芯		
1	BK U	1.5mm ²
2	BN V	1.5mm ²
3	GN YE	1.5mm ²
4	BK	1.5mm ²
5	WH	1.5mm ²
6	BN K	1.5mm ²

芯位	线芯颜色	导体规格
8芯		
1	BK 1	1.5mm ²
PE	GN YE	1.5mm ²
3	BK 2	1.5mm ²
4	BK 3	1.5mm ²
A	BK 5	0.75mm ²
B	BK 6	0.75mm ²
C	BK 7	0.75mm ²
D	BK 8	0.75mm ²

芯位	线芯颜色	导体规格
12芯		
1	PK	0.25mm ²
2	RD	0.25mm ²
3	BK	0.25mm ²
4	BU	0.25mm ²
5	BN	0.25mm ²
6	GN	0.25mm ²
7	VT	0.25mm ²
8	GY	0.25mm ²
9	外部护套	
10	WH	0.5mm ²
11	NC	
12	BN	0.5mm ²

芯位	线芯颜色	导体规格
17芯		
1	YE	0.14mm ²
2	GN	0.14mm ²
3	RD	0.14mm ²
4	NC	
5	BU	0.14mm ²
6	NC	
7	BNBU	0.5mm ²
8	GNBK	0.22mm ²
9	GNRD	0.22mm ²
10	BNRD	0.5mm ²
11	BK	0.14mm ²
12	BN	0.14mm ²
13	OG	0.14mm ²
14	WHBK	0.14mm ²
15	BNGY	0.22mm ²
16	BNYE	0.22mm ²
17	内部护套	

*接线定义按常规标准，如按协议或者其他请联系我司业务。

电气参数

Angled M623 Signal Male Square Assembled Socket (Crimp,
Mount hole 19.8x19.8)

芯数	P型	额定电流	额定电压		导体规格		E型
			A/C	D/C	AWG	mm ²	
6		20A	300V	300V	14	2.5	
7		20A	300V	300V	14	2.5	
9		8A	150V	150V	16	1.5	
9P(8+1)		8A/20A	300V	150V	16/14	1.5/2.5	
12		8A	150V	150V	18	1	
17		8A	150V	150V	18	1	