## T系列-TGG 直式插头






■ 电缆线夹

## 技术参数

22.1.2.20	
插拔次数:	>1000次
湿度:	在60℃时最高达95%
温度范围:	-55℃ ~ +200℃
抗振动性能:	10-2000 Hz,15g
抗冲击性能:	100g,6ms
盐雾腐蚀试验:	>96 h
防护等级:	IP68
屏蔽效果:	在10MHz下>95dB;在1GHz下>80dB



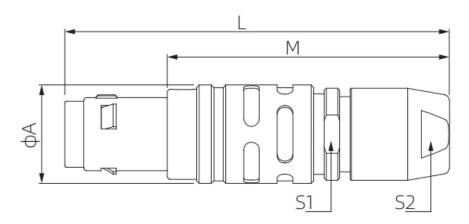

编号(1	Model)	尺寸(Size)			线缆外径φ			
型号(Type)	系列(Series)	Α	L	М	<b>S</b> 1	<b>S</b> 2	最小(Min.)	最大(Max.)
TGG	П	7.0	33.2	25.2	5.5	5.0	2.4	3.0
TGG	OT	9.5	39.0	29.0	7.5	7.0	1.0	5.0
TGG	1T	12.0	46.0	35.0	11.0	9.0	1.3	6.5
TGG	2T	15.0	55.0	43.0	14.0	12.0	1.3	8.5
TGG	3T	18.8	64.0	49.0	16.0	14.0	2.6	10.5

## 订购产品

## T系列-TGG 直式插头



