

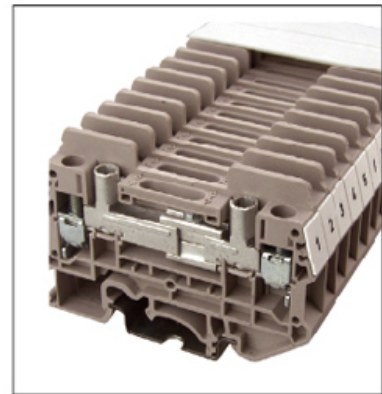
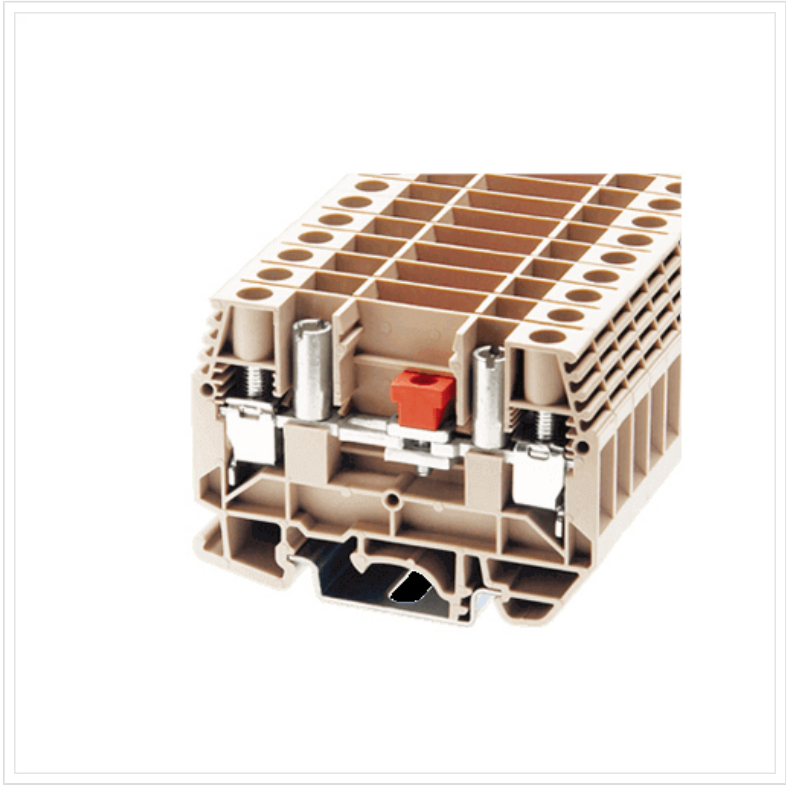


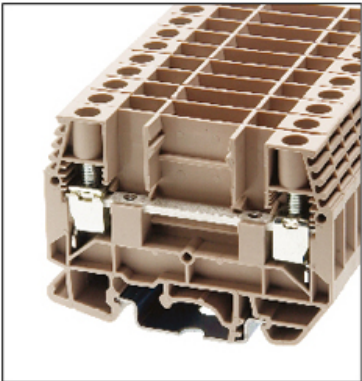

DKTD6N		
安规认证		
规格	UL	IEC
额定电压	300V	800V
额定电流	42A	41A
单芯线(AWG/mm²)	20~8 / 0.5~6	
多芯线(AWG/mm²)	20~8 / 0.5~6	
冲击耐压	8KV	
扭力(N·m)	1.2	
螺丝	M4	
剥线长度	9~10mm	
绝缘材料	PA	
TxHxW(mm)	8x72x49.7	
包装量	50	

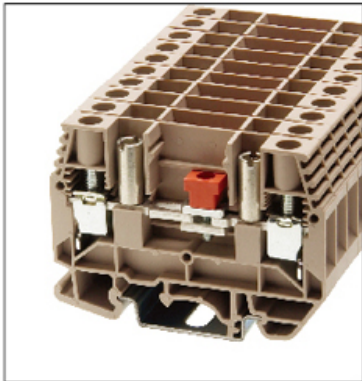

DKTD6		
安规认证 		
规格	UL	IEC
额定电压	300V/600V	800V
额定电流	48A/5A	41A
单芯线(AWG/mm2)	20~8 / 0.5~6	
多芯线(AWG/mm2)	20~8 / 0.5~6	
冲击耐压	8KV	
扭力	2	
螺丝	M4	
剥线长度	8mm	
绝缘材料	PA	
TxHxW(mm)	8x65.2x47.65	
包装量	50	

DKTL6		
安规认证 		
规格	UL	IEC
额定电压	300V/600V	800V
额定电流	48A/5A	41A
单芯线(AWG/mm2)	20~8 / 0.5~6	
多芯线(AWG/mm2)	20~8 / 0.5~6	
冲击耐压	8KV	
扭力	2	
螺丝	M4	
剥线长度	8mm	
绝缘材料	PA	
TxHxW(mm)	8x65.2x47.65	
包装量	50	

