


M8 Male Front Mount Socket (Solder, Screw M8\*0.5, Metal interface)

尺寸图

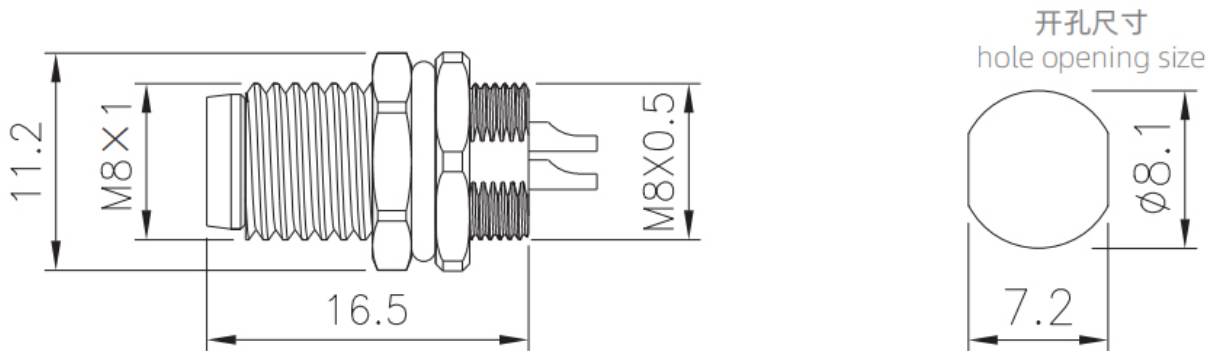

接线定义

| 芯位<br>Pins | 线芯颜色<br>Wire core color |  |  |  |
|------------|-------------------------|--|--|--|
|            | 3芯(Pins)                |  |  |  |
| 1          | BN                      |  |  |  |
| 2          | -                       |  |  |  |
| 3          | BU                      |  |  |  |
| 4          | BK                      |  |  |  |

| 芯位<br>Pins | 线芯颜色<br>Wire core color |  |                      |  |
|------------|-------------------------|--|----------------------|--|
|            | 4芯A编码(4 Pins A-Code)    |  | 4芯D编码(4 Pins D-Code) |  |
| 1          | BN                      |  | YE                   |  |
| 2          | WH                      |  | WH                   |  |
| 3          | BU                      |  | OG                   |  |
| 4          | BK                      |  | BU                   |  |

| 芯位<br>Pins | 线芯颜色<br>Wire core color |  |                      |  |
|------------|-------------------------|--|----------------------|--|
|            | 5芯A编码(5 Pins A-Code)    |  | 5芯B编码(5 Pins B-Code) |  |
| 1          | BN                      |  | BN                   |  |
| 2          | WH                      |  | WH                   |  |
| 3          | BU                      |  | BU                   |  |
| 4          | BK                      |  | BK                   |  |
| 5          | GY                      |  | GY                   |  |

| 芯位<br>Pins | 线芯颜色<br>Wire core color |  |
|------------|-------------------------|--|
|            | 6芯(Pins)                |  |
| 1          | BN                      |  |
| 2          | WH                      |  |
| 3          | BU                      |  |
| 4          | BK                      |  |
| 5          | GY                      |  |
| 6          | PK                      |  |

| 芯位<br>Pins | 线芯颜色<br>Wire core color |  |
|------------|-------------------------|--|
|            | 8芯(Pins)                |  |
| 1          | WH                      |  |
| 2          | BN                      |  |
| 3          | GN                      |  |
| 4          | YE                      |  |
| 5          | GY                      |  |
| 6          | PK                      |  |
| 7          | BU                      |  |
| 8          | RD                      |  |

\*接线定义按常规标准，如按协议或者其他请联系我司业务。  
Wiring definition according to conventional standards, if according to the agreement or other please contact our sales.

电气参数

M8 Male Front Mount Socket (Solder, Screw M8\*0.5, Metal interface)

| 芯数<br>Pins | 针型 Male |   |   | 额定电流<br>Ratedcurrent                          | 额定电压<br>Rated voltage                    |     | 导体规格<br>Conductor size |                 | 孔型 Female |   |   |  |
|------------|---------|---|---|-----------------------------------------------|------------------------------------------|-----|------------------------|-----------------|-----------|---|---|--|
|            | A       | B | D |                                               | A/C                                      | D/C | AWG                    | mm <sup>2</sup> | A         | B | D |  |
| 3          |         |   |   | 3A                                            | 60V                                      | 60V | 24                     | 0.25            |           |   |   |  |
| 4          |         |   |   | A型(A-Code):<br>3A<br>D型(D-Code):<br>4A        | A型(A-Code):<br>60V<br>D型(D-Code):<br>48V | 60V | 24                     | 0.25            |           |   |   |  |
| 5          |         |   |   | 3A                                            | 30V                                      | 30V | 24                     | 0.25            |           |   |   |  |
| 6          |         |   |   | A型(A-Code):<br>1.5A<br>D型(D-Code):<br>1.5A/3A |                                          | 30V | 30V                    | 26              | 0.14      |   |   |  |
| 8          |         |   |   | 1.5A                                          | 30V                                      | 30V | 26                     | 0.14            |           |   |   |  |