




- 产品类型：PCB端子,
- 接线方式：弹簧连接,
- 间距：3.50mm(3.81mm),
- 电压：300V,
- 电流：12A,
- 位数：2-24P

基本参数

|                                                     |                                                                                          |
|-----------------------------------------------------|------------------------------------------------------------------------------------------|
| 间距(Pitch):                                          | 3.50mm(3.81mm)                                                                           |
| 电压(Rated voltage)-UL:                               | 300V                                                                                     |
| 电流(Rated current)-UL:                               | 12A                                                                                      |
| 电压(Rated voltage)-IEC:                              | -                                                                                        |
| 电流(Rated current)-IEC:                              | -                                                                                        |
| 线径(Wire range)-UL:                                  | 30-16AWG                                                                                 |
| 线径(Wire range)-IEC:                                 | -                                                                                        |
| 位数(Pole number):                                    | 02~24P                                                                                   |
| 绝缘材料(Insulation Material):                          | PA66 UL94 V-0                                                                            |
| 电流承载部件材料和镀层(Material & Plating of Current carrier): | Copper alloy, Tin plated                                                                 |
| 绝缘电阻(Insulation Resistance):                        | 500MΩ or more at DC500V                                                                  |
| 耐电压(1分钟)(Withstanding Voltage/1Min):                | 1600V                                                                                    |
| 接线螺丝(Wire clamp unit Screw), 最大扭矩(Torque Max.):     | M2.0, 0.25Nm Max                                                                         |
| 剥线长度(Wire stripping length):                        | 5.0mm                                                                                    |
| 使用温度(Operating temperature):                        | -40℃ ~ +115℃                                                                             |
| 焊接方式(Soldering recommend):                          | Wave soldering, 260℃ 5S Max (Single Wave), 260℃ 10S Max(Double Wave)                     |
| 认证(Approval):                                       | c  us |

尺寸图

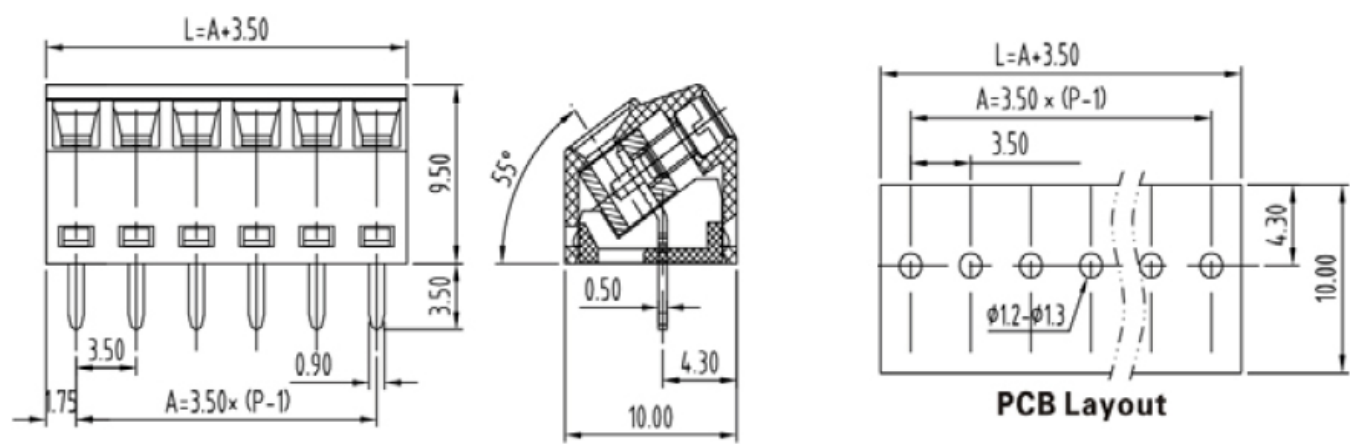

订购产品

| 产品名称  | 间距     | 位数     | 产品型号     | 3D下载 | 2D下载 |
|-------|--------|--------|----------|------|------|
| 固定式端子 | 3.50mm | 02~24P | SA350-09 |      |      |
| 固定式端子 | 3.81mm | 02~24P | SA381-09 |      |      |

资料下载

|                      |                          |
|----------------------|--------------------------|
| <a href="#">产品目录</a> | <a href="#">接线端子选型手册</a> |
|----------------------|--------------------------|