




- 产品类型：PCB端子,
- 接线方式：弹簧连接,
- 间距：5.00mm,
- 电压：250V,
- 电流：16A,
- 位数：2-24P

基本参数

|                                                     |                                                                       |
|-----------------------------------------------------|-----------------------------------------------------------------------|
| 间距(Pitch):                                          | 5.00mm                                                                |
| 电压(Rated voltage)-UL:                               | 250V                                                                  |
| 电流(Rated current)-UL:                               | 16A                                                                   |
| 电压(Rated voltage)-IEC:                              | 320V                                                                  |
| 电流(Rated current)-IEC:                              | 24A                                                                   |
| 线径(Wire range)-UL:                                  | 26-12AWG                                                              |
| 线径(Wire range)-IEC:                                 | 0.34-2.5mm <sup>2</sup>                                               |
| 位数(Pole number):                                    | 02~24P                                                                |
| 绝缘材料(Insulation Material):                          | PA66 UL94 V-0                                                         |
| 电流承载部件材料和镀层(Material & Plating of Current carrier): | Copper alloy, Tin plated                                              |
| 绝缘电阻(Insulation Resistance):                        | 500MΩ or more at DC500V                                               |
| 耐电压(1分钟)(Withstanding Voltage/1Min):                | 2200V                                                                 |
| 接线螺丝(Wire clamp unit Screw), 最大扭矩(torque Max.):     | M2.5, 0.4Nm Max                                                       |
| 接线弹片材料(Material of Clamp spring):                   | -                                                                     |
| 剥线长度(Wire stripping length):                        | 6.6mm                                                                 |
| 使用温度(Operating temperature):                        | -40°C ~ +105°C                                                        |
| 焊接方式(Soldering recommend):                          | Wave soldering, 260°C 5S Max(Single Wave), 260°C 10S Max(Double Wave) |
| 认证(Approval):                                       |                                                                       |

尺寸图

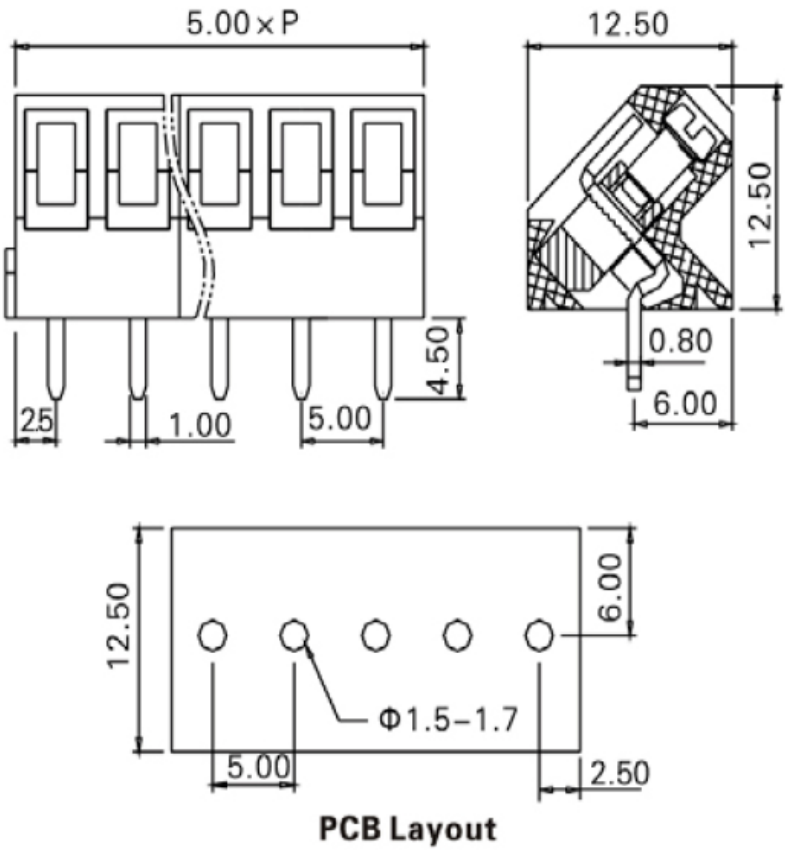

订购产品

| 产品名称  | 间距     | 位数     | 产品型号     | 3D下载 | 2D下载 |
|-------|--------|--------|----------|------|------|
| 固定式端子 | 5.00mm | 02~24P | SA500-04 |      |      |

资料下载

|      |                          |
|------|--------------------------|
| 产品目录 | <a href="#">接线端子选型手册</a> |
|------|--------------------------|