




- 产品类型：插拔式端子,
- 接线方式：弹簧连接,
- 间距：3.50mm(3.81mm),
- 电压：300V,
- 电流：8A,
- 位数：2-24P

基本参数

间距(Pitch):	3.50mm(3.81mm)
电压(Rated voltage)-UL:	300V
电流(Rated current)-UL:	8A
电压(Rated voltage)-IEC:	150V
电流(Rated current)-IEC:	10A
线径(Wire range)-UL:	30-14AWG
线径(Wire range)-IEC:	1.5mm ²
位数(Pole number):	02~24P
绝缘材料(Insulation Material):	PA66 UL94 V-0
电流承载部件材料和镀层(Material & Plating of Current carrier):	Copper alloy, Tin plated
绝缘电阻(Insulation Resistance):	500MΩ or more at DC500V
耐电压(1分钟)(Withstanding Voltage/1Min):	2000V
额定冲击电压(Rated surge voltage):	2500V
接线螺丝(Wire clamp unit Screw), 最大扭矩(torque Max.):	M2, 0.2 ~ 0.25N·m
固定螺丝(Mounting Screw), 扭矩(torque):	M2.5, 0.2 ~ 0.25N·m
接线弹片材料(Material of Clamp spring):	-
剥线长度(Wire stripping length):	6.5 ~ 7.5mm
使用温度(Operating temperature):	-40℃ ~ +105℃
焊接方式(Soldering recommend):	-
认证(Approval):	  

尺寸图

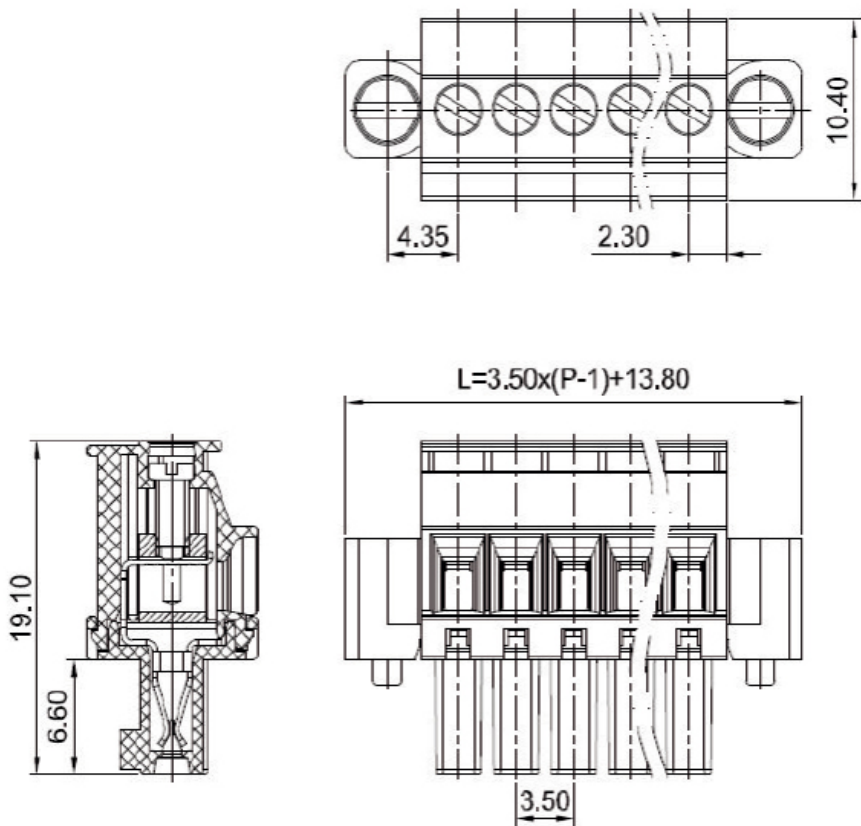

订购产品

产品名称	间距	位数	产品型号	3D下载	2D下载
插拔式端子	3.50mm	02~24P	SPA350-W00RL		
插拔式端子	3.81mm	02~24P	SPA381-W00RL		

资料下载

产品目录	接线端子选型手册
------	--------------------------