




- 产品类型：插拔式端子,
- 接线方式：弹簧连接,
- 间距：5.00mm(5.08mm),
- 电压：300V,
- 电流：16A,
- 位数：4-48P

基本参数

|                                                     |                                                                                                   |
|-----------------------------------------------------|---------------------------------------------------------------------------------------------------|
| 间距(Pitch):                                          | 5.00mm(5.08mm)                                                                                    |
| 电压(Rated voltage)-UL:                               | 300V                                                                                              |
| 电流(Rated current)-UL:                               | 16A                                                                                               |
| 电压(Rated voltage)-IEC:                              | 320V                                                                                              |
| 电流(Rated current)-IEC:                              | 20A                                                                                               |
| 线径(Wire range)-UL:                                  | -                                                                                                 |
| 线径(Wire range)-IEC:                                 | -                                                                                                 |
| 位数(Pole number):                                    | 04~48P                                                                                            |
| 绝缘材料(Insulation Material):                          | PA66 UL94 V-0                                                                                     |
| 电流承载部件材料和镀层(Material & Plating of Current carrier): | Copper alloy, Tin plated                                                                          |
| 绝缘电阻(Insulation Resistance):                        | 500MΩ or more at DC500V                                                                           |
| 耐电压(1分钟)(Withstanding Voltage/1Min):                | 2200V                                                                                             |
| 额定冲击电压(Rated surge voltage):                        | -                                                                                                 |
| 接线螺丝(Wire clamp unit Screw), 最大扭矩(torque Max.):     | -                                                                                                 |
| 固定螺丝(Mounting Screw), 扭矩(torque):                   | M2.5, 0.25Nm Max                                                                                  |
| 接线弹片材料(Material of Clamp spring):                   | -                                                                                                 |
| 剥线长度(Wire stripping length):                        | -                                                                                                 |
| 使用温度(Operating temperature):                        | -40℃ ~ +105℃                                                                                      |
| 焊接方式(Soldering recommend):                          | Wave soldering, 260℃ 5S Max(Single Wave), 260℃ 10S Max(Double Wave)                               |
| 认证(Approval):                                       | UL(Applying)  |

尺寸图

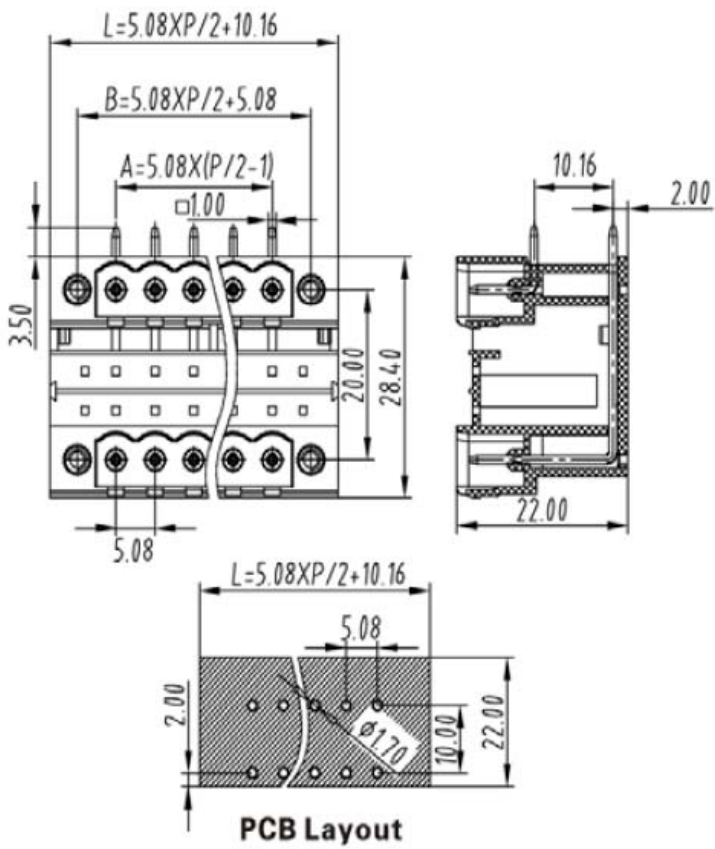

订购产品

| 产品名称  | 间距     | 位数     | 产品型号         | 3D下载 | 2D下载 |
|-------|--------|--------|--------------|------|------|
| 插拔式端子 | 5.00mm | 04~48P | SPB500-DW00R |      |      |
| 插拔式端子 | 5.08mm | 04~48P | SPB508-DW00R |      |      |

资料下载

|      |                          |
|------|--------------------------|
| 产品目录 | <a href="#">接线端子选型手册</a> |
|------|--------------------------|