




- 产品类型：插拔式端子,
- 接线方式：弹簧连接,
- 间距：7.50mm(7.62mm),
- 电压：300V,
- 电流：16A,
- 位数：2-12P

基本参数

|                                                     |                                                                                     |
|-----------------------------------------------------|-------------------------------------------------------------------------------------|
| 间距(Pitch):                                          | 7.50mm(7.62mm)                                                                      |
| 电压(Rated voltage)-UL:                               | 300V                                                                                |
| 电流(Rated current)-UL:                               | 16A                                                                                 |
| 电压(Rated voltage)-IEC:                              | 630V                                                                                |
| 电流(Rated current)-IEC:                              | 20A                                                                                 |
| 线径(Wire range)-UL:                                  | 30-12AWG                                                                            |
| 线径(Wire range)-IEC:                                 | 0.2-2.5mm²sol/str 4mm²sol                                                           |
| 位数(Pole number):                                    | 02~12P                                                                              |
| 绝缘材料(Insulation Material):                          | PA66 UL94 V-0                                                                       |
| 电流承载部件材料和镀层(Material & Plating of Current carrier): | Copper alloy, Tin plated                                                            |
| 绝缘电阻(Insulation Resistance):                        | 500MΩ or more at DC500V                                                             |
| 耐电压(1分钟)(Withstanding Voltage/1Min):                | 3000V                                                                               |
| 额定冲击电压(Rated surge voltage):                        | 6000V                                                                               |
| 接线螺丝(Wire clamp unit Screw), 最大扭矩(torque Max.):     | M3, 0.5N·m                                                                          |
| 固定螺丝(Mounting Screw), 扭矩(torque):                   | -                                                                                   |
| 接线弹片材料(Material of Clamp spring):                   | -                                                                                   |
| 剥线长度(Wire stripping length):                        | 7.0mm                                                                               |
| 使用温度(Operating temperature):                        | -40℃ ~ +115℃                                                                        |
| 焊接方式(Soldering recommend):                          | -                                                                                   |
| 认证(Approval):                                       |  |

尺寸图

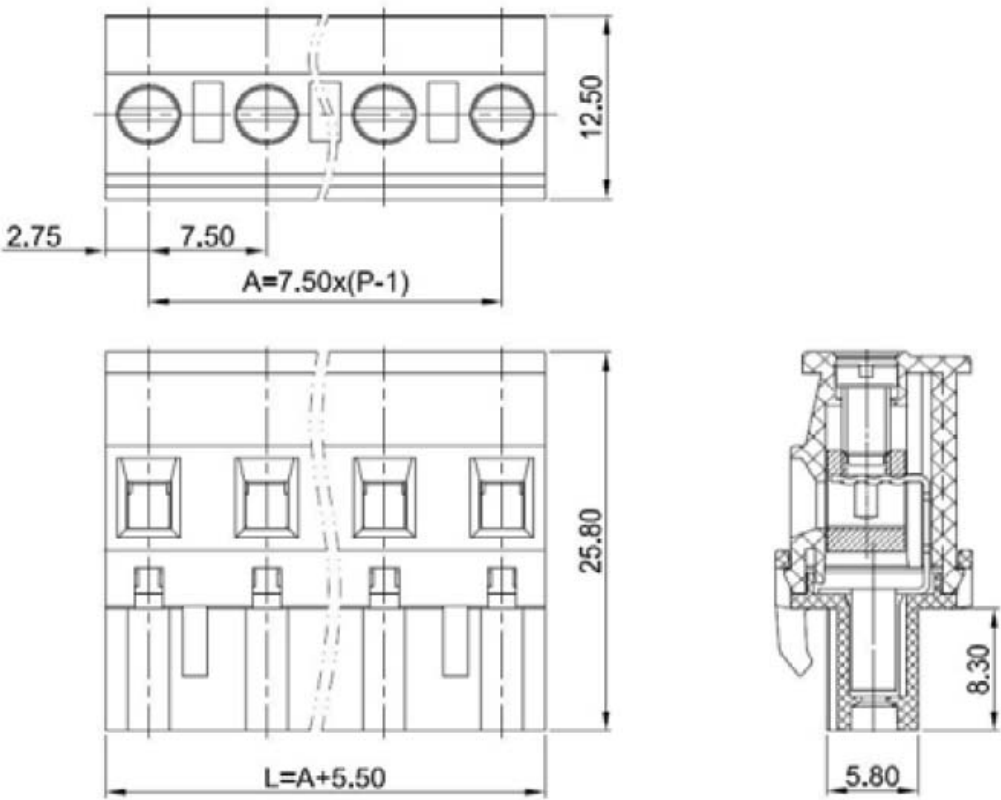

订购产品

| 产品名称  | 间距     | 位数     | 产品型号       | 3D下载 | 2D下载 |
|-------|--------|--------|------------|------|------|
| 插拔式端子 | 7.50mm | 02~12P | SPA750-00R |      |      |
| 插拔式端子 | 7.62mm | 02~12P | SPA762-00R |      |      |

资料下载

|                      |                          |
|----------------------|--------------------------|
| <a href="#">产品目录</a> | <a href="#">接线端子选型手册</a> |
|----------------------|--------------------------|