




- 产品类型：插拔式端子,
- 接线方式：弹簧连接,
- 间距：7.62mm,
- 电压：600V,
- 电流：41A,
- 位数：2-16P

基本参数

| | |
|---|--------------------------|
| 间距(Pitch): | 7.62mm |
| 电压(Rated voltage)-UL: | 600V |
| 电流(Rated current)-UL: | 41A |
| 电压(Rated voltage)-IEC: | 1000V |
| 电流(Rated current)-IEC: | 41A |
| 线径(Wire range)-UL: | 8-24AWG |
| 线径(Wire range)-IEC: | 0.2-6mm ² |
| 位数(Pole number): | 02~16P |
| 绝缘材料(Insulation Material): | PA66 UL94 V-0 |
| 电流承载部件材料和镀层(Material & Plating of Current carrier): | Copper alloy, Tin plated |
| 绝缘电阻(Insulation Resistance): | 500MΩ or more at DC500V |
| 耐电压(1分钟)(Withstanding Voltage/1Min): | 4200V |
| 额定冲击电压(Rated surge voltage): | 8000V |
| 接线螺丝(Wire clamp unit Screw), 最大扭矩(torque Max.): | M3, 0.5N·m(0.8N·m Max) |
| 固定螺丝(Mounting Screw), 扭矩(torque): | - |
| 接线弹片材料(Material of Clamp spring): | Stainless Steel |
| 剥线长度(Wire stripping length): | 10mm |
| 使用温度(Operating temperature): | -40°C ~ +115°C |
| 焊接方式(Soldering recommend): | - |
| 认证(Approval): | |

尺寸图

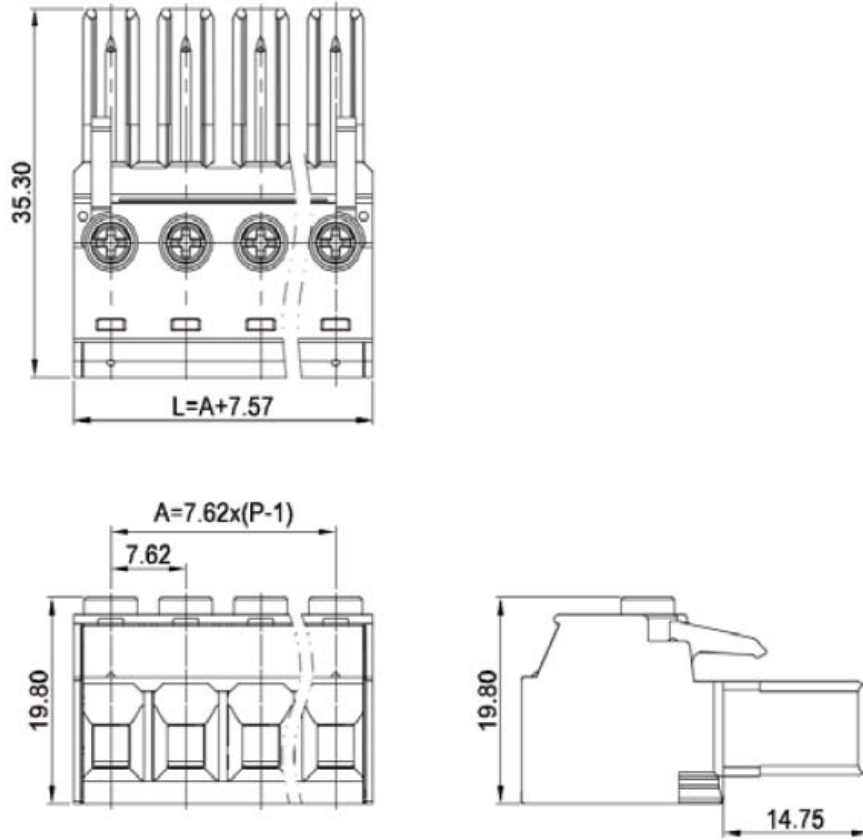

订购产品

| 产品名称 | 间距 | 位数 | 产品型号 | 3D下载 | 2D下载 |
|-------|--------|--------|-----------|------|------|
| 插拔式端子 | 7.62mm | 02~16P | SPA762-01 | | |

资料下载

| | |
|------|--------------------------|
| 产品目录 | 接线端子选型手册 |
|------|--------------------------|